



SPECIFICATIONS

Model Name	PRO Z790-A MAX WIFI
CPU Support	Supports Intel [®] Core [™] Next-gen / 13 th Gen / 12 th Gen, Pentium [®] Gold and Celeron [®] Processors
CPU Socket	LGA 1700
Chipset	Intel [®] Z790 Chipset
Expansion Slots	1x PCIe 5.0 x16 slot 1x PCIe 4.0 x16 slot 2x PCIe 3.0 x1 slots
Display Interface	Support 4K@60Hz as specified in HDMI [™] 2.1, DisplayPort 1.4 – Requires Processor Graphics
Memory Support	4 DIMMs, Dual Channel DDR5-7800+MHz (OC)
Storage	4x M.2 Gen4 x4 64Gbps slots, 6x SATA 6Gbps ports
USB ports	1x USB 3.2 Gen 2x2 20Gbps (1 Type-C), 4x USB 3.2 Gen 2 10Gbps (3 Type-A + 1 Type-C), 4x USB 3.2 Gen 1 5Gbps (4 Type-A), 6x USB 2.0
LAN	Intel [®] 2.5G LAN
WiFi / BT	Wi-Fi 7 Solution, Bluetooth 5.4
Audio	8-Channel (7.1) HD Audio with Audio Boost 5

FEATURES



Lightning Gen 5

The latest PCIe 5.0 solution with up to 128GB/s bandwidth for maximum transfer speed.



Latest DDR5 Memory

A huge step of DDR performance enhancement with the latest DDR5 memory and MSI Memory Boost technology.



Wi-Fi 7

The latest wireless solution with a new 320MHz channel, achieving a maximum transmission speed of 5.8Gbps, which is 2.4 times faster than Wi-Fi 6/6E.



Lightning USB 20G

Built-in USB 3.2 Gen 2x2 port, offers 20Gbps transmission speed, 4X faster than USB 3.2 Gen 1.



Ausgeklügeltes Kühlsystem

Mit optimalem PWM und Schaltkreisen können Prozessoren noch mehr Leistung geben.



M.2 Shield FROZR

Strengthened built-in M.2 thermal solution. Keeps M.2 SSDs safe while preventing throttling, making them run faster.



2.5G Network Solution

Featuring premium 2.5G LAN to deliver better network experience.



Pre-installed I/O Shielding

Better EMI protection and more convenience for installation



Frozr AI Cooling


Detect CPU & GPU temperatures and automatically adjust system fan duty to a proper value.



Core Boost

Verbessertes Design zur Unterstützung von Mehrkern-Prozessoren

CONNECTIONS

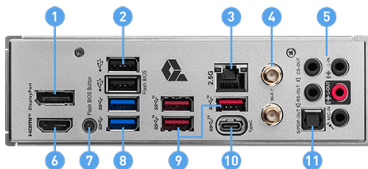

1. DisplayPort
2. USB 2.0
3. 2.5G LAN
4. Wi-Fi / Bluetooth
5. Audio Connectors
6. HDMI[™]
7. Flash BIOS Button
8. USB 3.2 Gen 1 5Gbps Type-A
9. USB 3.2 Gen 2 10Gbps Type-A
10. USB 3.2 Gen 2x2 20Gbps Type-C
11. S/PDIF-OUT